

Linear Solenoids


Lamellar Solenoids



Pull and Push Version / Very Strong / Extremely Solid

STSL-15b

Type

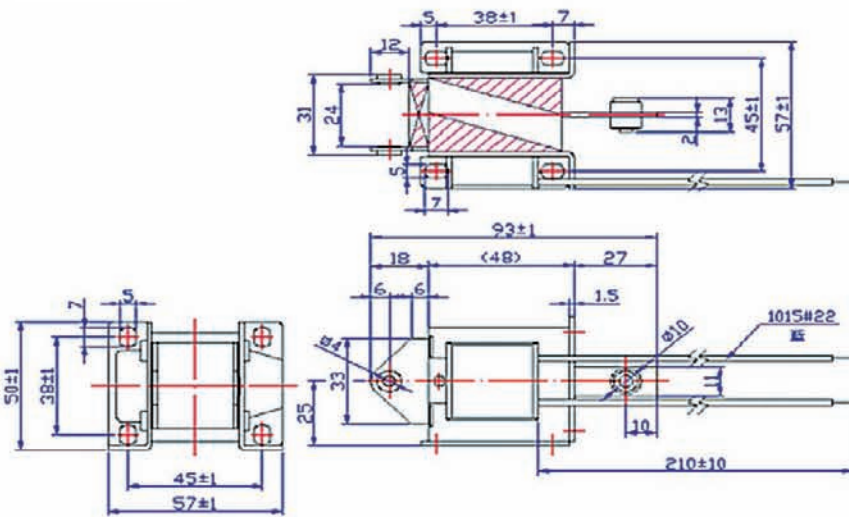

Description

Heavy duty AC laminated solenoid for active current supply.
No rectifier necessary.
Available forces from 5-60N.

Coil Data

Frequency range: 50-60 HZ
Nominal force (N): 20
Nominal stroke (mm): 15
Length x width x height (mm): 93 x 57 x 50

Nominal current (VAC)	Inrush current (A)	Holding current (A)
110	4	0,46
220	2	0,23

Special Development On Request

Please contact us for your custom designed part (frame, force, special application, etc.)



SHENG TENG GmbH
VAT-ID: DE 271 696 661
General Manager:
Silvio Bruske / Frank Loeffler
District Court Munich reg. # HRB185777

Angerbrunnenstraße 11
D-85356 Freising
GERMANY

Phone: +49-8161-986 44 84
Fax: +49-8161-986 44 74
eMail: office@shengteng.de

www.shengteng.de