

Linear Solenoids


Cylinder Solenoids




Stick and Fix-Mounting / With Over-Current / Extremely Solid

STSZ-3923

Type

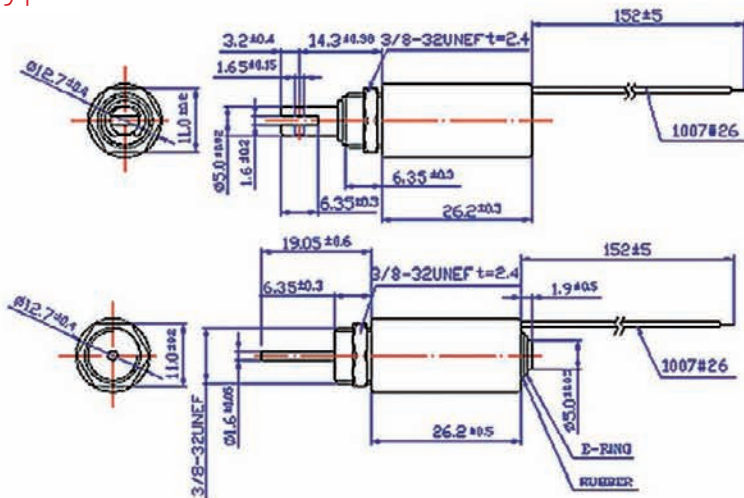

Force-stroke-diagram (N/mm)

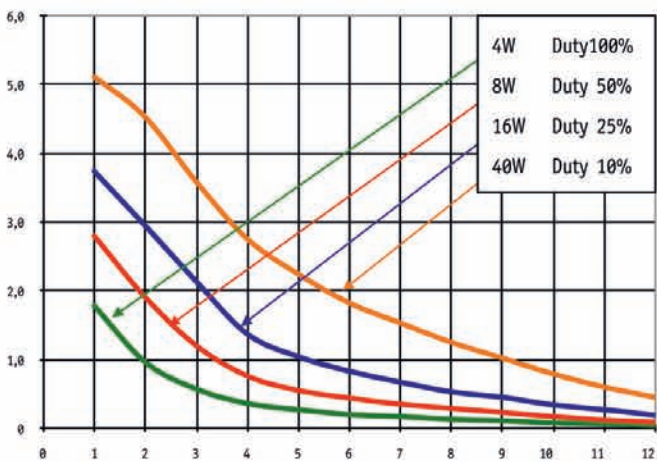

Description

Regarding the closed frame body the tubular solenoid has got a very high efficiency.

Useable in rough ambience.

Tubular Solenoid

Stroke: 3-9 mm

Weight: 23 g

Coil Data

Relative Duty Cycle (%)	100	50	25	10
Max. Performance (Watt)	4	8	16	40
Max. Duty Cycle (sec.)	∞	50	5	2

Solenoid Model

Version:

Pull magnet

Pressure Solenoid with spring return

Current:

12 VDC (standard)

24 VDC (standard)

Please ask for other options.

Special Development On Request

Please contact us for your custom designed part (frame, force, special application, etc.)



SHENG TENG GmbH
 VAT-ID: DE 271 696 661
 General Manager:
 Silvio Bruske / Frank Loeffler
 District Court Munich reg. # HRB185777

Angerbrunnenstraße 11
 D-85356 Freising
 GERMANY

Phone: +49-8161-986 44 84
 Fax: +49-8161-986 44 74
 eMail: office@shengteng.de

www.shengteng.de